

CABLES

***7.6. Cables with Concentrated Loads.** Cables are used in many engineering applications, such as suspension bridges, transmission lines, aerial tramways, guy wires for high towers, etc. Cables may be divided into two categories, according to their loading: (1) cables supporting concentrated loads, (2) cables supporting distributed loads. In this section, we shall examine cables of the first category.

Consider a cable attached to two fixed points A and B and supporting n given vertical concentrated loads P_1, P_2, \dots, P_n (Fig. 7.13a). We assume that the cable is *flexible*, i.e., that its resistance to bending is small and may be neglected. We further assume that the *weight of the cable is negligible* compared with the loads supported by the cable. Any portion of cable between successive loads may therefore be considered as a two-force member, and the internal forces at any point in the cable reduce to a *force of tension directed along the cable*.

We assume that each of the loads lies in a given vertical line, i.e., that the horizontal distance from support A to each of the loads is known; we also assume that the horizontal and vertical distances between the supports are known. We propose to determine the shape of the cable, i.e., the vertical distance from A to each of the points C_1, C_2, \dots, C_n , and also the tension T in each portion of the cable.

We first draw the free-body diagram of the entire cable (Fig. 7.13b). Since the slope of the portions of cable attached at A and B is not known, the reactions at A and B must be represented by two components each. Thus, four unknowns are involved, and the three equations of equilibrium are not sufficient to determine the reactions at A and B .† We must therefore obtain an additional equation by considering the equilibrium of a portion of the cable. This is possible if we know the coordinates x and y of a point D of the cable. Drawing the free-body diagram of the portion of cable AD (Fig. 7.14a) and writing $\Sigma M_D = 0$, we obtain an additional relation between the scalar components A_x and A_y and may determine the reactions at A and B . The problem would remain indeterminate, however, if we did not know the coordinates of D , unless some other relation between A_x and A_y (or between B_x and B_y) were given. The cable might hang in any of various possible ways, as indicated by the dashed lines in Fig. 7.13b.

Once A_x and A_y have been determined, the vertical distance from A to any point of the cable may be easily found. Considering point C_2 , for example, we draw the free-body diagram of

† Clearly, the cable is not a rigid body; the equilibrium equations represent, therefore, *necessary but not sufficient conditions* (see Sec. 6.11).

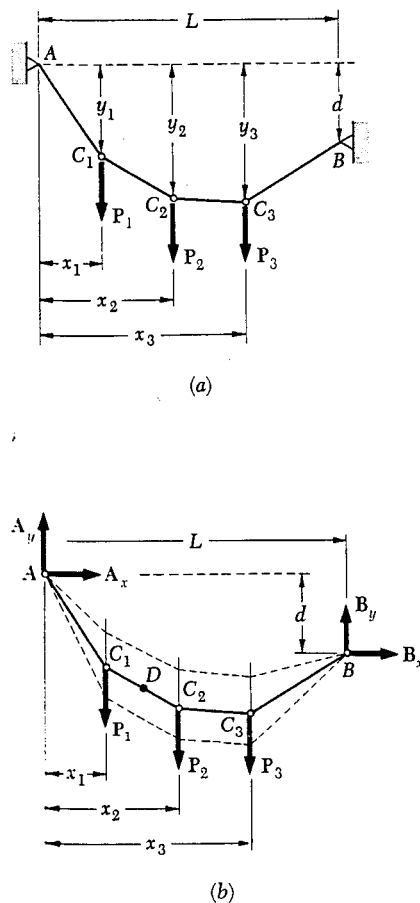


Fig. 7.13

the portion of cable AC_2 (Fig. 7.14b). Writing $\Sigma M_{C_2} = 0$, we obtain an equation which may be solved for y_2 . Writing $\Sigma F_x = 0$ and $\Sigma F_y = 0$, we obtain the components of the force T representing the tension in the portion of cable to the right of C_2 . We observe that $T \cos \theta = -A_x$; the horizontal component of the tension force is the same at any point of the cable. It follows that the tension T is maximum when $\cos \theta$ is minimum, i.e., in the portion of cable which has the largest angle of inclination θ . Clearly, this portion of cable must be adjacent to one of the two supports of the cable.

***7.7. Cables with Distributed Loads.** Consider a cable attached to two fixed points A and B and carrying a *distributed load* (Fig. 7.15a). We saw in the preceding section that, for a cable supporting concentrated loads, the internal force at any point is a force of tension directed along the cable. In the case of a cable carrying a distributed load, the cable hangs in the shape of a curve, and the internal force at a point D is a force of tension T directed along the tangent to the curve. Given a certain distributed load, we propose in this section to determine the tension at any point of the cable. We shall also see in the following sections how the shape of the cable may be determined for two particular types of distributed loads.

Considering the most general case of distributed load, we draw the free-body diagram of the portion of cable extending from the lowest point C to a given point D of the cable (Fig. 7.15b). The forces acting on the free body are the tension force T_0 at C , which is horizontal, the tension force T at D , directed along the tangent to the cable at D , and the resultant W of the distributed load supported by the portion of cable CD . Drawing the corresponding force triangle (Fig. 7.15c), we obtain the following relations:

$$T \cos \theta = T_0 \quad T \sin \theta = W \quad (7.5)$$

$$T = \sqrt{T_0^2 + W^2} \quad \tan \theta = \frac{W}{T_0} \quad (7.6)$$



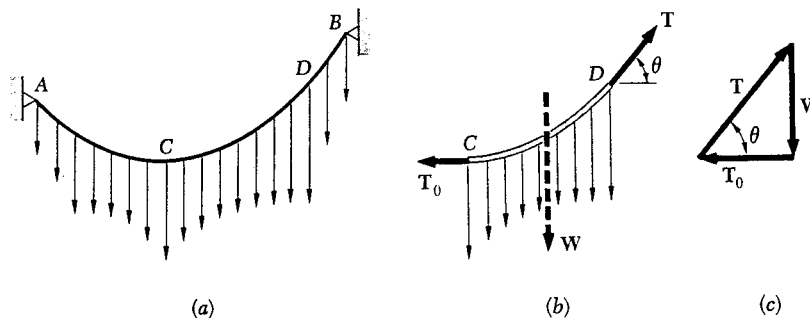


Fig. 7.15



(a)



(b)

Fig. 7.14

From the relations (7.5), it appears that the horizontal component of the tension force T is the same at any point and that the vertical component of T is equal to the magnitude W of the load measured from the lowest point. Relations (7.6) show that the tension T is minimum at the lowest point and maximum at one of the two points of support.

*** 7.8. Parabolic Cable.** Let us assume, now, that the cable AB carries a load *uniformly distributed along the horizontal* (Fig. 7.16a). Cables of suspension bridges may be assumed loaded in this way, since the weight of the cables is small compared with the weight of the roadway. We denote by w the load per unit length (*measured horizontally*) and express it in N/m or in lb/ft. Choosing coordinate axes with origin at the

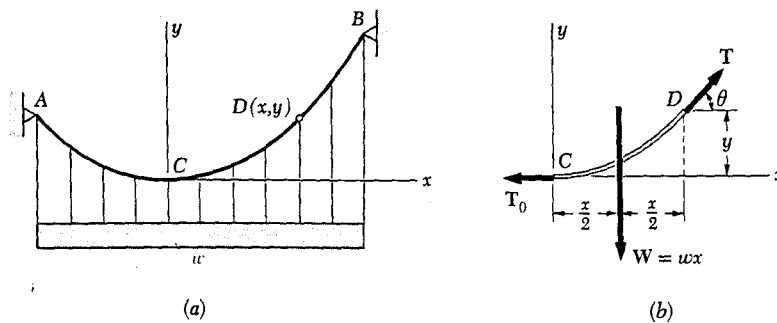


Fig. 7.16

lowest point C of the cable, we find that the magnitude W of the total load carried by the portion of cable extending from C to the point D of coordinates x and y is $W = wx$. The relations (7.6) defining the magnitude and direction of the tension force at D become

$$T = \sqrt{T_0^2 + w^2x^2} \quad \tan \theta = \frac{wx}{T_0} \quad (7.7)$$

Moreover, the distance from D to the line of action of the resultant W is equal to half the horizontal distance from C to D (Fig. 7.16b). Summing moments about D , we write

$$+\uparrow \Sigma M_D = 0: \quad wx \frac{x}{2} - T_0 y = 0$$

$$y = \frac{wx^2}{2T_0} \quad (7.8)$$

This is the equation of a *parabola* with a vertical axis and its vertex at the origin of coordinates. The curve formed by cables loaded uniformly along the horizontal is thus a parabola.†

When the supports A and B of the cable have the same elevation, the distance L between the supports is called the *span* of the cable and the vertical distance h from the supports to the lowest point is called the *sag* of the cable (Fig. 7.17a). If the span and sag of a cable are known, and if the load w per unit horizontal length is given, the minimum tension T_0 may be found by substituting $x = L/2$ and $y = h$ in formula (7.8). Formulas (7.7) and (7.8) will then define the tension at any point and the shape of the cable.

When the supports have different elevations, the position of the lowest point of the cable is not known and the coordinates x_A, y_A and x_B, y_B of the supports must be determined. To this effect, we express that the coordinates of A and B satisfy Eq. (7.8) and that $x_B - x_A = L, y_B - y_A = d$, where L and d denote, respectively, the horizontal and vertical distances between the two supports (Fig. 7.17b and c).

The length of the cable from its lowest point C to its support B may be obtained from the formula

$$s_B = \int_0^{x_B} \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx \quad (7.9)$$

Differentiating (7.8), we obtain the derivative $dy/dx = wx/T_0$; substituting into (7.9) and using the binomial theorem to expand the radical in an infinite series, we have

$$\begin{aligned} s_B &= \int_0^{x_B} \sqrt{1 + \frac{w^2 x^2}{T_0^2}} dx \\ &= \int_0^{x_B} \left(1 + \frac{w^2 x^2}{2T_0^2} - \frac{w^4 x^4}{8T_0^4} + \dots\right) dx \\ &= x_B \left(1 + \frac{w^2 x_B^2}{6T_0^2} - \frac{w^4 x_B^4}{40T_0^4} + \dots\right) \end{aligned}$$

and, since $w x_B^2 / 2T_0 = y_B$,

$$s_B = x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B}\right)^2 - \frac{2}{5} \left(\frac{y_B}{x_B}\right)^4 + \dots\right] \quad (7.10)$$

The series converges for values of the ratio y_B/x_B less than 0.5; in most cases, this ratio is much smaller, and only the first two terms of the series need be computed.

† Cables hanging under their own weight are not loaded uniformly along the horizontal, and they do not form a parabola. The error introduced by assuming a parabolic shape for cables hanging under their own weight, however, is small when the cable is sufficiently taut. A complete discussion of cables hanging under their own weight is given in the next section.



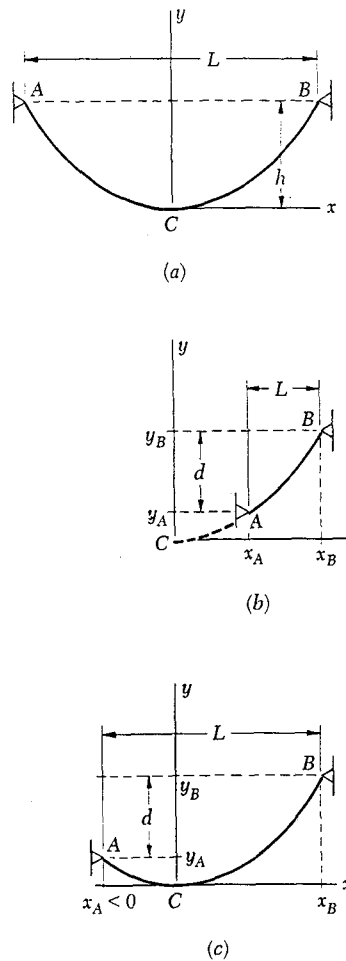


Fig. 7.17

SAMPLE PROBLEM 7.8

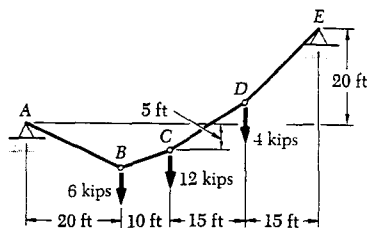

The cable AE supports three vertical loads from the points indicated. If point C is 5 ft below the left support, determine (a) the elevations of points B and D , (b) the maximum slope and the maximum tension in the cable.

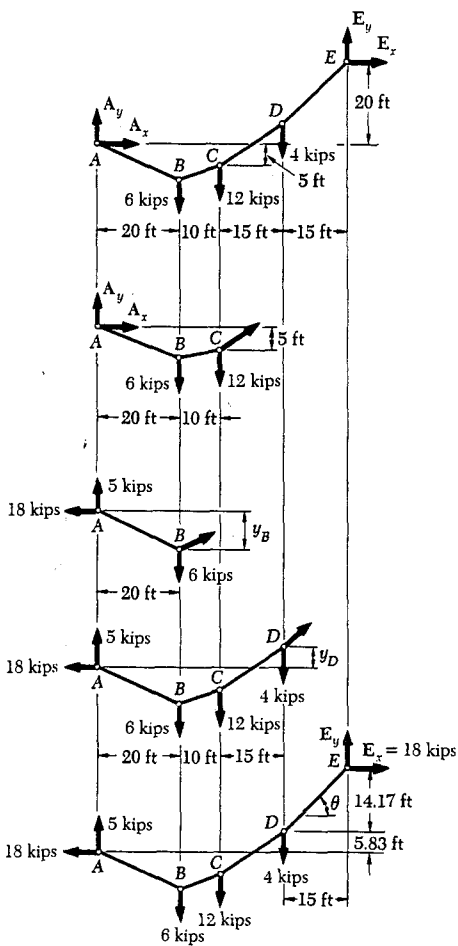

Solution. The reaction components A_x and A_y are determined as follows:

Free Body: Entire Cable

$$\begin{aligned}
 +\sum M_E = 0: \\
 A_x(20 \text{ ft}) - A_y(60 \text{ ft}) + (6 \text{ kips})(40 \text{ ft}) \\
 \quad + (12 \text{ kips})(30 \text{ ft}) + (4 \text{ kips})(15 \text{ ft}) = 0 \\
 20A_x - 60A_y + 660 = 0
 \end{aligned}$$

Free Body: ABC

$$\begin{aligned}
 +\sum M_C = 0: \quad -A_x(5 \text{ ft}) - A_y(30 \text{ ft}) + (6 \text{ kips})(10 \text{ ft}) = 0 \\
 -5A_x - 30A_y + 60 = 0
 \end{aligned}$$

Solving the two equations simultaneously, we obtain

$$\begin{aligned}
 A_x = -18 \text{ kips} \quad A_x = 18 \text{ kips} \leftarrow \\
 A_y = +5 \text{ kips} \quad A_y = 5 \text{ kips} \uparrow
 \end{aligned}$$

a. Elevation of Point B. Considering the portion of cable AB as a free body, we write

$$\begin{aligned}
 +\sum M_B = 0: \quad (18 \text{ kips})y_B - (5 \text{ kips})(20 \text{ ft}) = 0 \\
 y_B = 5.56 \text{ ft below A} \leftarrow
 \end{aligned}$$

Elevation of Point D. Using the portion of cable $ABCD$ as a free body, we write


$$\begin{aligned}
 +\sum M_D = 0: \\
 -(18 \text{ kips})y_D - (5 \text{ kips})(45 \text{ ft}) + (6 \text{ kips})(25 \text{ ft}) + (12 \text{ kips})(15 \text{ ft}) = 0 \\
 y_D = 5.83 \text{ ft above A} \leftarrow
 \end{aligned}$$

b. Maximum Slope and Maximum Tension. We observe that the maximum slope occurs in portion DE . Since the horizontal component of the tension is constant and equal to 18 kips, we write


$$\tan \theta = \frac{14.17 \text{ ft}}{15 \text{ ft}} \quad \theta = 43.4^\circ \leftarrow$$

$$T_{\max} = \frac{18 \text{ kips}}{\cos \theta} \quad T_{\max} = 24.8 \text{ kips} \leftarrow$$

EXAMPLE PROBLEM 7.9



A light cable is attached to a support at A, passes over a small pulley at B, and supports a load P. Knowing that the sag of the cable is 0.5 m and that the mass per unit length of the cable is 0.75 kg/m, determine (a) the magnitude of the load P, (b) the slope of the cable at B, and (c) the total length of the cable from A to B. Since the ratio of the sag to the span is small, assume the cable to be parabolic. Also, neglect the weight of the portion of cable from B to D.



a. Load P. We denote by C the lowest point of the cable and draw the free-body diagram of the portion CB of cable. Assuming the load to be uniformly distributed along the horizontal, we write

$$w = (0.75 \text{ kg/m})(9.81 \text{ m/s}^2) = 7.36 \text{ N/m}$$

The total load for the portion CB of the cable is

$$W = wx_B = (7.36 \text{ N/m})(20 \text{ m}) = 147.2 \text{ N}$$

and is applied halfway between C and B. Summing moments about B, we write

$$+\uparrow \Sigma M_B = 0: \quad (147.2 \text{ N})(10 \text{ m}) - T_0(0.5 \text{ m}) = 0 \quad T_0 = 2944 \text{ N}$$

From the force triangle we obtain

$$\begin{aligned} T_B &= \sqrt{T_0^2 + W^2} \\ &= \sqrt{(2944 \text{ N})^2 + (147.2 \text{ N})^2} = 2948 \text{ N} \end{aligned}$$

Since the tension on each side of the pulley is the same, we find

$$P = T_B = 2948 \text{ N} \quad \blacktriangleleft$$

b. Slope of Cable at B. We also obtain from the force triangle

$$\tan \theta = \frac{W}{T_0} = \frac{147.2 \text{ N}}{2944 \text{ N}} = 0.05$$

$$\theta = 2.9^\circ \quad \blacktriangleleft$$

c. Length of Cable. Applying Eq. (7.10) between C and B, we write

$$\begin{aligned} s_B &= x_B \left[1 + \frac{2}{3} \left(\frac{y_B}{x_B} \right)^2 + \dots \right] \\ &= (20 \text{ m}) \left[1 + \frac{2}{3} \left(\frac{0.5 \text{ m}}{20 \text{ m}} \right)^2 + \dots \right] = 20.00833 \text{ m} \end{aligned}$$

The total length of the cable between A and B is twice this value,

$$\text{Length} = 2s_B = 40.0167 \text{ m} \quad \blacktriangleleft$$

